

Exposed Aggregate Paver Tiles by STEPSTONE, INC



For Distinctive Lanais,
Landings, & Runways

Specs: 4,000 PSI Hardrock Concrete.
Embedded with Del Rio tumbled exposed
aggregate from our quarry in California.
Hand-made at our factory in California—no
epoxy used. Stain repellent sealer is
factory applied. Walkable with bare feet,
yet non-slip.

Typically 1" to 1-1/8" thick for thin-set
applications, weighing 11#.



Being used for 10,000 sf of 2nd floor lanais of
Villas @ Mauna Lani on the Big Isle.
Developer: Stanford Carr
Contractors: Metcalf Construction & Waikoloa Tile,
who also used them at **Colony Villas @ Waikoloa**
Architect: Mike Kujubu, Alakea Design Group

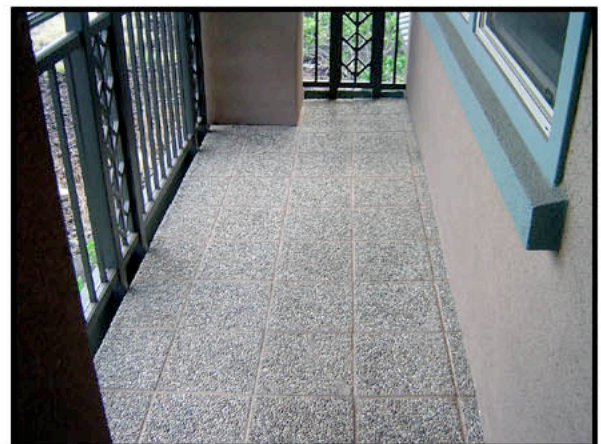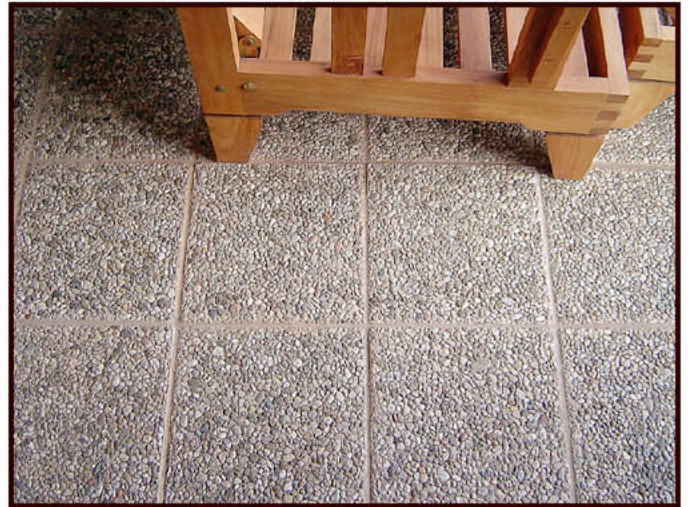

Hawaii Distributor:

BUILDING SYSTEMS HAWAII

808 885-0987 • 800 353-0934