

Exposed Aggregate Paver Tiles by STEPSTONE, INC

Distinctive Landings & Runways to Match Your STEPTREADS

Specs: 4,000 PSI Hardrock Concrete. Embedded with Del Rio exposed aggregate from our quarry in California. (No epoxy) Stain repellent sealer is factory applied, with a 5 year life expectancy.

Typically 1" X 12 X 12 for landings, which weigh 11#. They are typically mortar-set to concrete board or waterproofed plywood. They're walkable with bare feet, yet anti-slip. Normal maintenance would be once or twice yearly, medium power wash.



11 3/4" X 11 3/4" X 1" Almond color

Job Report: One Napili Way



5355 Lwr. Honopiilani Rd./Maui

Resident Mgr: Dan Williams (669 2007)

To rehab this existing landing, the tiles were removed, then a nosing tread was thinset down. Next went a 1/2" concrete board on the existing landing. Then the tiles were mortarset to the board. Then grouted, using baker's bellows. Color: Caramel



NOSING
TREAD
PROFILE

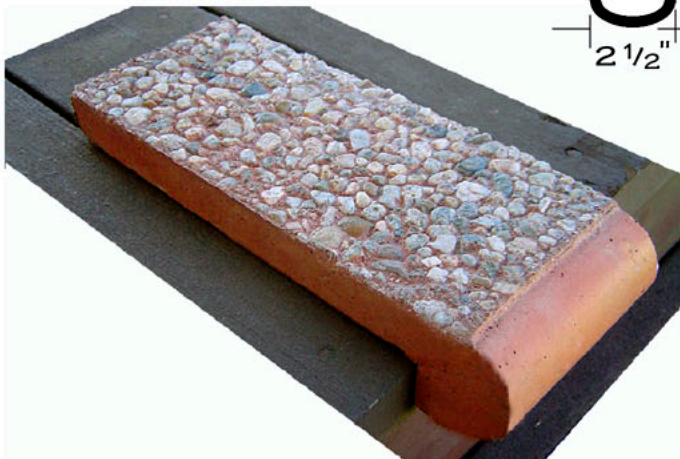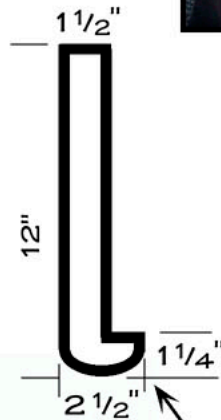

BUILDING SYSTEMS HAWAII

808 885-0987 • 800 353-0934