



STEPTREAD Specs

by STEPSTONE INC.


Reinforced Precast Open-Riser Stair Treads
Bolted to Wood Stringers



For NEW projects, these construction covers will save the cost of temporaries (\$5 ea).

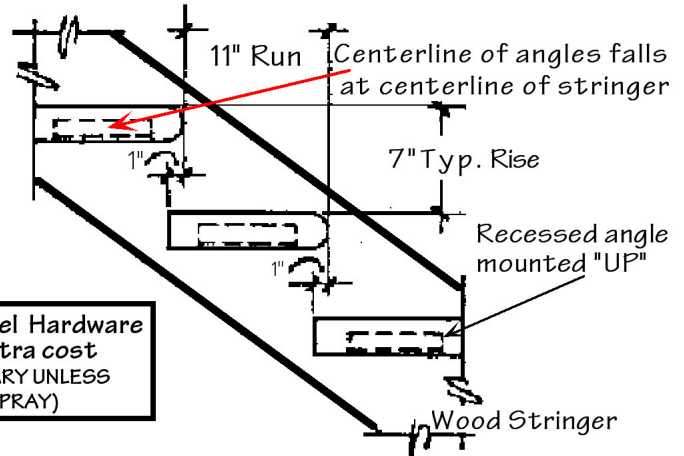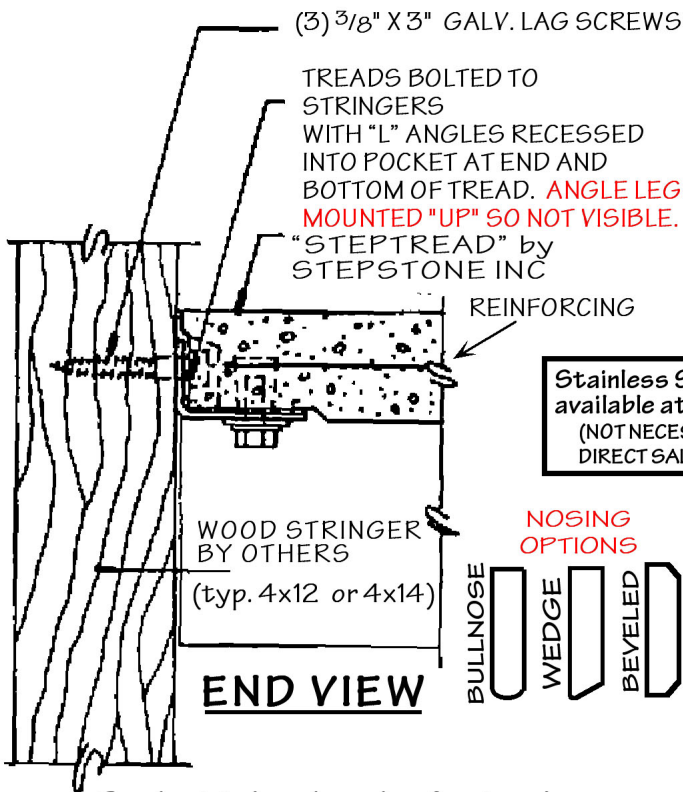


Stainless Steel Hardware available at extra cost (NOT NECESSARY UNLESS DIRECT SALT SPRAY)



MOUNTING HARDWARE FOR WOOD

- NON-CORROSIVE THREADED INSERTS W/ 3/8" dia. X 1 1/2" GALV. BLUNT BOLT W/ WASHERS FASTEN ANGLES TO TRDS
- 3/8" X 3" GALVANIZED LAGS
- 11 GA. GALVANIZED ANGLE 1 5/8 x 3 x 7 1/4"
- RECT. HOLES ALLOW ADJUSTMENT UP TO 1".
- ANGLES RECESS IN POCKET IN END AND BOTTOM OF TREAD.

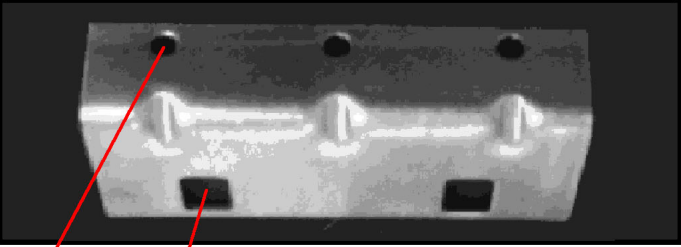


Product is hand made of natural material, so minor variation in color & size is normal.

Length to suit. (Optimum pricing is 48" or less). Usually ordered 1/4" less than minimum distance between stringers.



REINFORCING


2" x 6" / # 7 x # 10 ZINC PLATED WELDED STEEL GRATE DOUBLED OVER INSIDE NOSE

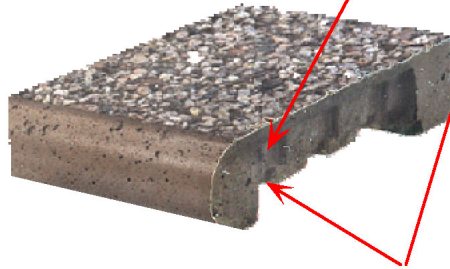

SPECS

- fc' = 5,000 PSI @ 28 DAYS
- WWM: ASTM C150 Type III
- SHEET METAL: ASTM A446
- Weight: 90# for 36" (30#/ft).
- Factory length tolerance: ± 1/8"
- Min. coefficient of friction: 60% wet & dry. Noncombustible.

STEPTREADS are made by STEPSTONE INC in Gardena, LA, California, since 1967. They are guaranteed against hidden shipping damage, or manufacturing defects or breakage under normal usage for five years. They would be replaced free, excluding labor & shipping.



Hawaii Distributor:
BUILDING SYSTEMS HAWAII
808 885-0987 • 800 353-0934
web:bldgssystemshawaii.com • email:bsystems@kona.net